REGULATOR

SERIES: AS-R

INDUMART Canada
www.indumart.com

Indumart AS-R Series Regulators are used to maintain supply pressure to pneumatic systems with minimal variations and independent of the changes in the main pressure line.

High air flow with low pressure drop, good accuracy and repeatability of pressure setting and fast response time are the major advantages of the series AS-R regulators.

The AS-R Series is suitable for compressed air applications, as well as non-poisonous, non-corrosive and non-flammable gaseous media.

Size	⅛" - ¼"	⅜" - ½"	¾" - 1"
Working Pressure	230 psi, 16 bar, 1600 kPa		
Flow (Nl/min) @ 600 kPa	700	2600	4600
Press. Gauge Thread	⅛"		¼"
Max. Temperasture	50°C		
Body Material	Zn+Al+Mg alloy, epoxy painted		
Pressure Spring	St. steel		
Internal Seals	NBR		
Weight (kg)	0.3	0.7	2.1

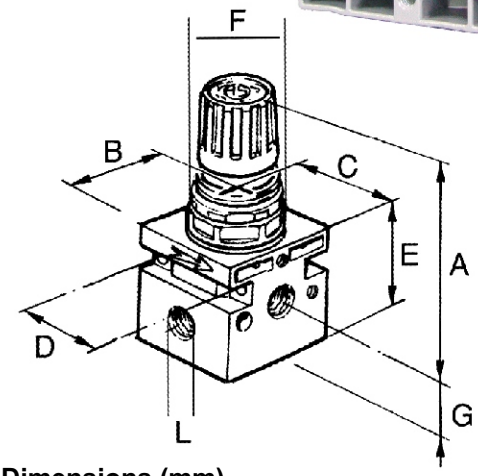

Dimensions (mm)

Size	⅛" - ¼"	⅜" - ½"	¾" - 1"
A	64	78	129
B	42	60	80
C	42	60	80
D	32	46	66
E	42	60	80
F	30 x 1.5	38 x 2	55 x2
G	21	30	40
L	⅛"	⅛"	¼"

⅛"-¼"

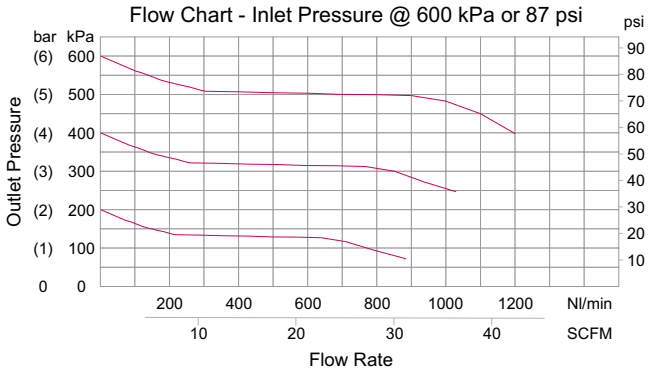

⅜"-½"

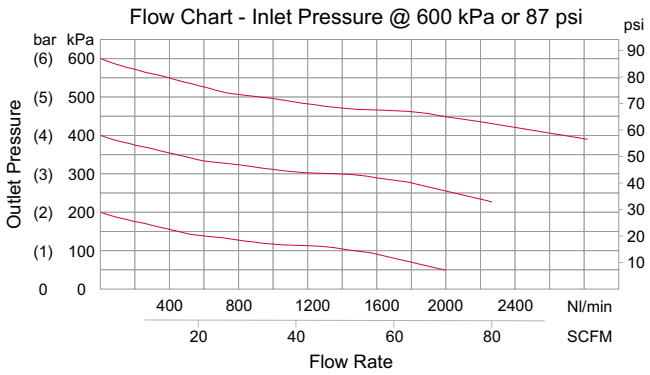
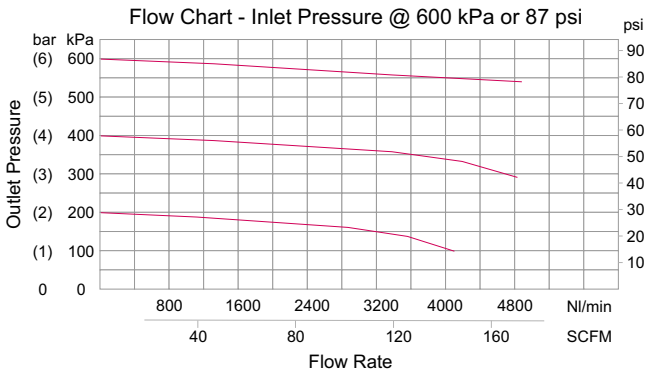
¾"-1"